


DATASHEET

XS4 Original+ DIN

The Salto XS4 Original+ is designed to fit DIN18250 and 18251 standard doors prepared for DIN 18250 mortise locks standard. Easy to install and retrofit, it can replace your existing door hardware and fits any door with a broad range of different models and functions. The XS4 Original+ incorporates the latest BLUEnet wireless and mobile credentials technology to accommodate access control needs of both today and tomorrow.

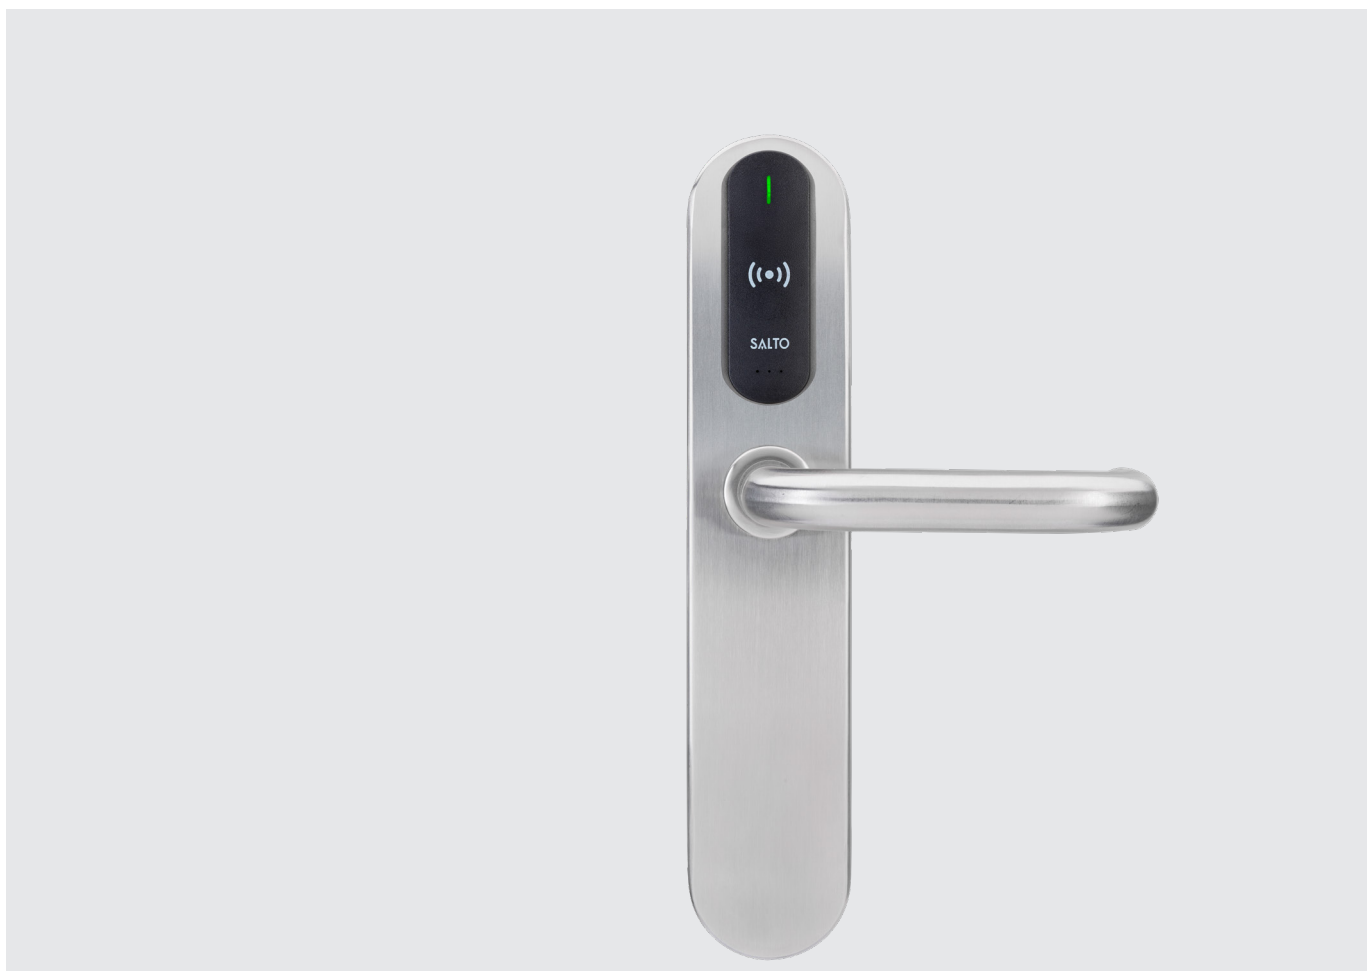

TECHNICAL DATA:

Reader dimensions :	284 x 57 x 22 mm
Weight:	2 kg
Handle rotation:	33°
Door thicknesses:	32 mm - 120 mm
Distance from the handle to the cylinder	72 mm
Square spindles:	7mm, 8mm, 8mm split, 9mm, 9mm split.
Power source:	3 LR3 batteries (AAA size) (optional lithium FR03)
Number of openings¹:	Salto Space: > 106.000 (physical credentials) > 108.500 (mobile Bluetooth LE) > 99.700 (mobile NFC) Salto KS: > 113.800 (physical credentials) > 105.900 (mobile Bluetooth LE) > 113.600 (mobile NFC) Salto Homelok: > 83.800 (physical credentials) > 129.000 (mobile Bluetooth LE)
Maximum events on lock audit:	1861 (Salto Space) 1462 (Salto KS and Salto Homelok)
Environmental conditions Outdoor:	-35 °C / +60 °C. without condensation.
Environmental conditions Indoor:	-5 °C / +50 °C without condensation (optional -35°C / +60°C)
IP class:	IP54 (optional E5 - IP56 ²)
Certifications:	CE, FCC, IC, ACMA, EN 179, EN 1634-1 (Ei30, Ei60), PAS24 (optional)

¹Maximum numbers depending on the used credential

²External escutcheon

OPENING MODES:

Standard:	•
Office mode:	•
Timed office:	•
Automatic opening:	•
Automatic opening + office	•
Toggle:	•
Timed Toggle:	•
Amok mode:	—
Exit leaves open mode:	•


CREDENTIAL TECHNOLOGIES:

JustIN Mobile Credentials¹:	•
NXP MIFARE²:	•

¹Bluetooth Digital Key and Near Field Communication (NFC) capability.

² MIFARE® DESFire® EV1/EV2/ EV3, MIFARE® Plus, MIFARE® Ultralight C, MIFARE® Classic.

TECHNICAL DRAWING:

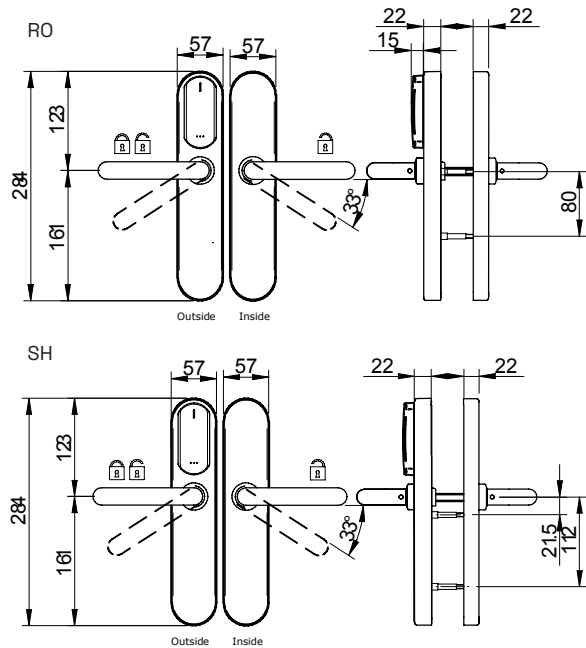

SALTO PLATFORMS:



SVN data-on-card	•	—	•
JustIN Mobile	•	•	•
BLUenet Wireless	• ⁴	•	•
Apple Wallet	—	—	•

¹Salto Space. On-premise access control platform

²Salto KS. Cloud-based access control platform

³Salto Homelok. Cloud-based access control platform

⁴RFnet Wireless versions are not compatible

FINISH:

IM Satin Stainless - BHMA630 US32D	•
IP Polished Stainless - BHMA629 US32	•
PM PVD satin brass type - BHMA731 US4	•
PP PVD bright brass type - BHMA724 US3	•
NE Black chromium - BHMA687	•
DB PVD Dark Bronze - BHMA640 US10B	•
BC BioCote anti-microbial	•

READER FINISH:

Black:	•
White:	•

HANDLES:

Compatible handles*	U, L, W, H, S, B, P, J, T, Y, Z, O, N, G, K, 2, 3, 4, 7, 5
----------------------------	--

High Transit:	• (optional)
----------------------	--------------

* Not all the handles are available in all finishes.


LOCKS:

Euro-DIN:	•
------------------	---

MODELS:


MODEL 50RO:

- 2 handles any type.

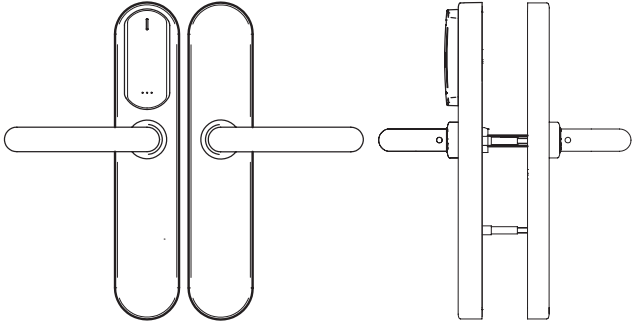


MODEL P6RO:

- 2 handles any type.
- Electronic "do not disturb" system
- Built in mechanical override with audit.

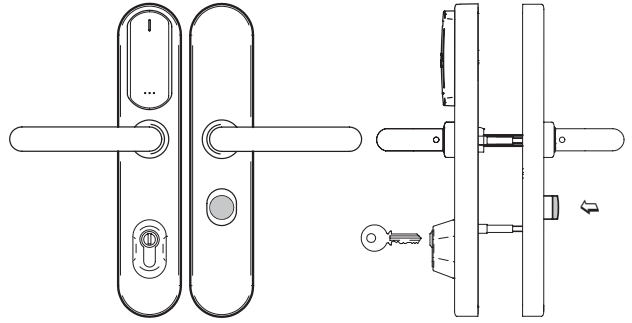


MODEL 56RO:

- 2 handles any type.
- Electronic "do not disturb" system (Not available in self-programmable).

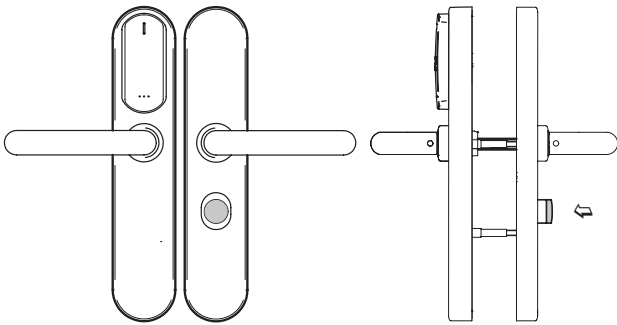


MODEL 50SH:

- 2 handles any type.

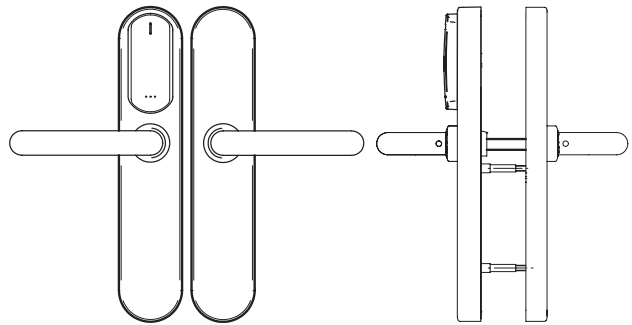


MODEL PORO:

- 2 handles any type.
- Built in mechanical override with audit.

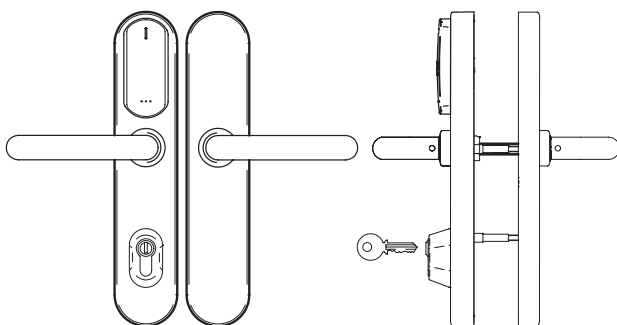

MODEL POSH:

- 2 handles any type.
- Built in mechanical override with audit.

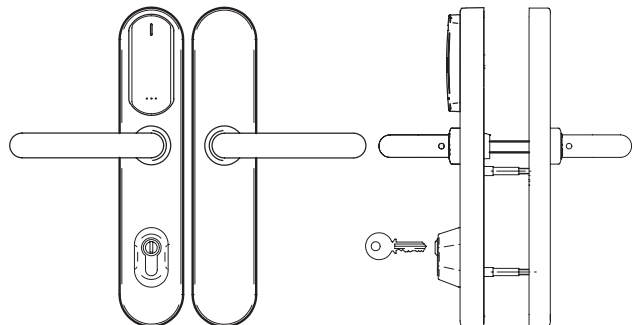

Salto Systems.

Get in touch with our team.

Give us a brief summary of your needs, your next project and we'll get back to you.

Spain, UK, France, Germany, Switzerland, The Netherlands, Belgium, Poland, Slovakia, Slovenia, Czech Republic, Denmark, Norway, Sweden, Finland, Italy, Portugal, US (NYC - Atlanta - LV), Canada, Mexico, Costa Rica, Colombia, Puerto Rico, Chile, UAE, India, South Africa, Singapore, China, Hong Kong, Korea, Vietnam, Australia, New Zealand.

